




MCU211-UDD-850

Precision's durable all stainless steel GN1/1 counters have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions when space is at a premium. Proudly designed in the UK, these counters are capable of meeting the highest demands of commercial kitchens all around the world.

When space is at a premium, and preparation workspace is required, a Precision refrigerated counter provides a practical, flexible and cost effective solution.

### Key Features:


- Stainless Steel Interior & Exterior
- Front Breathing & Venting Refrigeration System Designed To Operate In 43°C Ambient
- GN 1/1 Shelving System
- Anti-Drip Worktop
- Built-In Air Duct For Even Temperature Distribution
- R134A/R404A Refrigerant
- Zero ODP Injected Polyurethane Insulation - 60mm
- 2 / +4°C Refrigerator Temperature Range
- Electronic Controller With Easy Read LCD Screen
- Hot Gas Defrost
- Door / Drawer Locks Fitted As Standard
- Rifle Bore Coated Evaporators
- Integrated Flush Door Handle
- Hi / Lo Audio Visual Temperature Alarms
- Condensing Unit Safety System To Protect Compressor From Blocked Condensers
- Self Closing Doors
- Adjustable Legs
- Waste Heat Recovery Condensate Vaporiser System

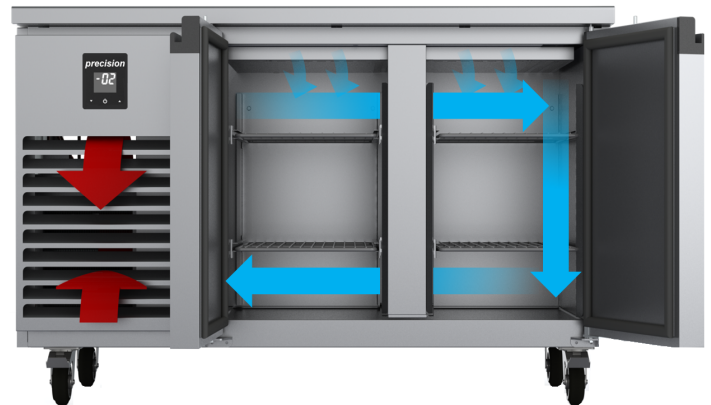

Front Breathing & Venting Refrigeration System - No side/rear/top/ bottom ventilation required - Perfect For Plinth Mount Applications

### Options:

- Bank of 2 Drawers - H - (185/185mm Depth)
- Bank of 3 Drawers - T - (100/100/100mm Depth)
- Remote Units - R (Width reduces by 120mm)
- Raised Pan Grid - PG / Countertop Pan Wells
- Biscuit Worktop - Lowers Height By 20mm
- Low Profile Castors - Lowers Height By 25mm
- Plinth Mount - Lowers Height to 700mm
- Adjustable Legs - Increases Height to 870mm Max
- ST/ST Back / Splashback
- Right Hand Condensing Unit
- Extra Shelves / Slides
- Precision Connect

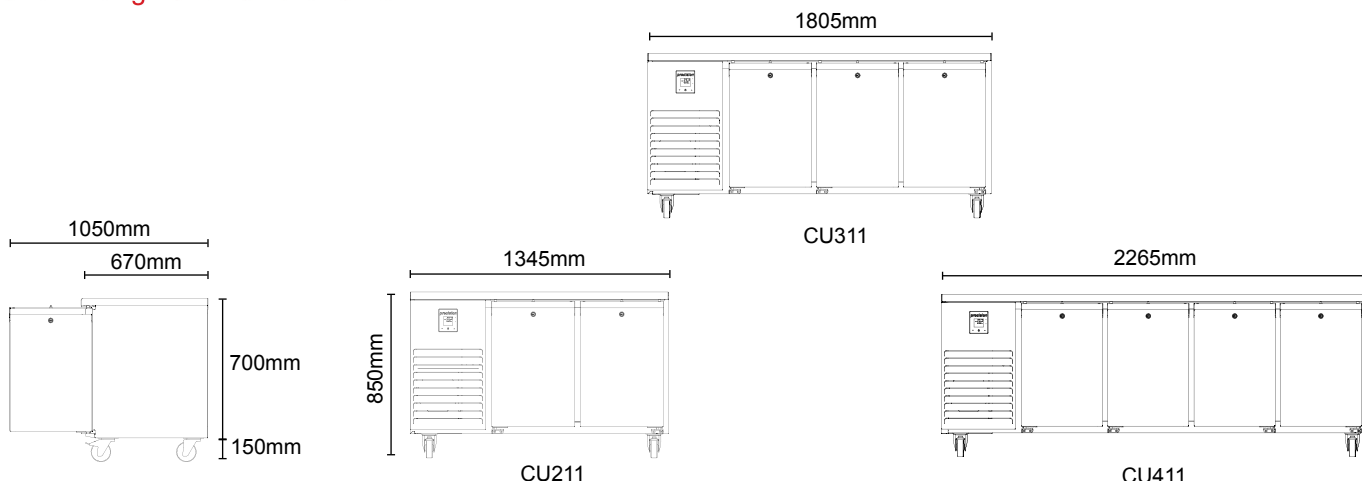

Model	MCU211	LCU211	MCU311	LCU311	MCU411
Type	Refrigerator	Freezer	Refrigerator	Freezer	Refrigerator
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN1/1	GN1/1	GN1/1	GN1/1	GN1/1
Number of Shelves	4	4	6	6	8
Max Number of Shelves (100mm Spacing)	10	10	15	15	20
Temperature Range	-2 / +4°C	-18 / -22°C	-2 / +4°C	-18 / -22°C	-2 / +4°C
Exterior WxDxH (mm)	1345x670x850	1345x670x850	1805x670x850	1805x670x850	2265x670x850
Net Usable Volume (litres)	300	300	450	450	600
Weight (KG)	115	120	145	150	185
Refrigerant	R134a	R404A	R134a	R404A	R134a
Refrigeration Watts (+45°C Condensing)	373	449	373	449	373
Evaporating Temp	-10°C	-30°C	-10°C	-30°C	-10°C
Heat Rejection Watts*	560	674	560	674	560
Power	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1
Running Amps	1.6	4.2	1.6	4.2	1.7
Total Electrical Load - kW	0.35	0.92	0.35	0.92	0.37

\* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet