

790 SERIES - GN2/1 COUNTERS

Precision's durable all stainless steel GN2/1 counters have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions when space is at a premium. Proudly designed in the UK, these counters are capable of meeting the highest demands of commercial kitchens all around the world.

When space is at a premium, and preparation workspace is required, a Precision refrigerated counter provides a practical, flexible and cost effective solution.



MCU321-UDDD-850

Key Features:

Stainless Steel Interior & Exterior

Front Breathing & Venting Refrigeration System
Designed To Operate In 43°C Ambient

GN 2/1 Shelving System

Anti-Drip Worktop

Built-In Air Duct For Even Temperature Distribution

R134A/R404A Refrigerant

Zero ODP Injected Polyurethane Insulation - 60mm

-2 / +4°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Hot Gas Defrost

Door / Drawer Locks Fitted As Standard

Rifle Bore Coated Evaporators

Integrated Flush Door Handle


Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect
Compressor From Blocked Condensers

Self Closing Doors

Adjustable Legs

Waste Heat Recovery Condensate Vaporiser System

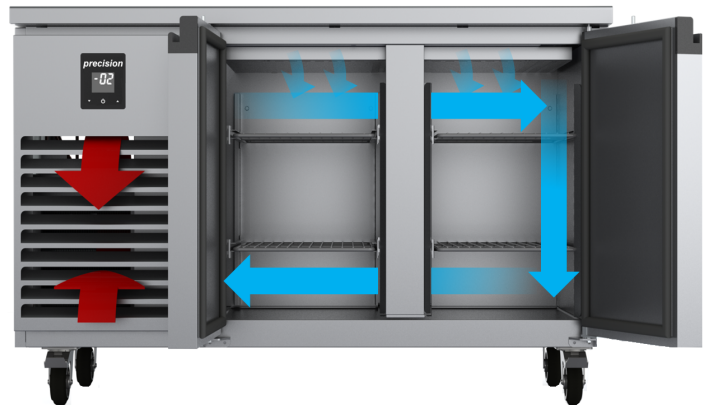

Front Breathing & Venting Refrigeration System - No side/rear/top/
bottom ventilation required - Perfect For Plinth Mount Applications

Options:

Bank of 2 Drawers - H - (185/185mm Depth)

Bank of 3 Drawers - T - (100/100/100mm Depth)

Remote Units - R (Width reduces by 120mm)

Raised Pan Grid - PG / Countertop Pan Wells

Biscuit Worktop - Lowers Height By 20mm

Low Profile Castors - Lowers Height By 25mm

Plinth Mount - Lowers Height to 700mm


Adjustable Legs - Increases Height to 870mm Max

ST/ST Back / Splashback

Right Hand Condensing Unit

Extra Shelves / Slides

Precision Connect

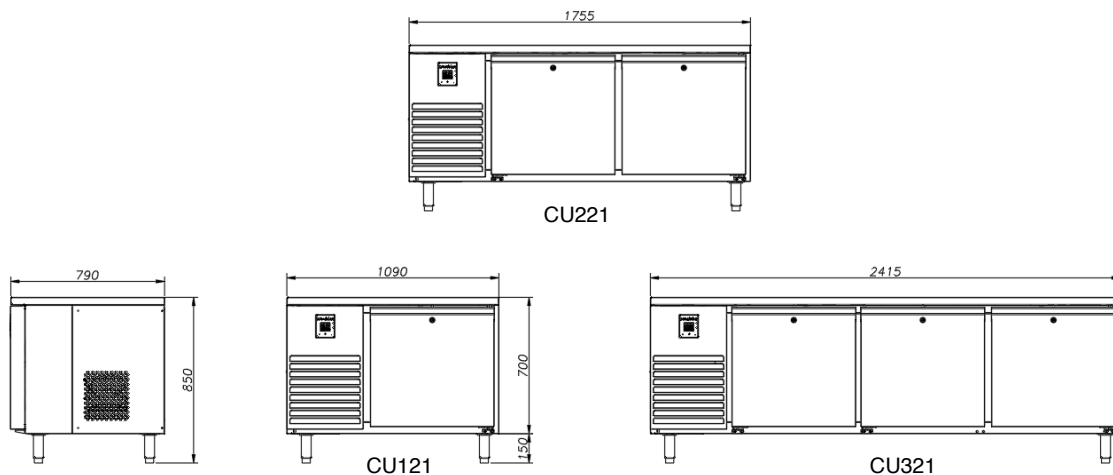

Model	MCU121	LCU121	MCU221	LCU221	MCU321
Type	Refrigerator	Freezer	Refrigerator	Freezer	Refrigerator
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN2/1	GN2/1	GN2/1	GN2/1	GN2/1
Number of Shelves	2	2	4	4	6
Max Number of Shelves (100mm Spacing)	10	10	15	15	20
Temperature Range	-2 / +4°C	-18 / -22°C	-2 / +4°C	-18 / -22°C	-2 / +4°C
Exterior WxDxH (mm)	1090x790x850	1090x790x850	1755x790x850	1755x790x850	2415x790x850
Net Usable Volume (litres)	300	300	600	600	900
Weight (KG)	110	115	140	145	185
Refrigerant	R134a	R404A	R134a	R404A	R134a
Refrigeration Watts (+45°C Condensing)	440	480	440	480	440
Evaporating Temp	-10°C	-30°C	-10°C	-30°C	-10°C
Heat Rejection Watts*	450	624	450	624	450
Power	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1
Running Amps	2	2.5	2	2.5	2
Total Electrical Load - kW	0.44	0.55	0.44	0.55	0.44

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet

