



PT1401

### Key Features:

Stainless Steel Interior & Exterior

Designed To Operate In 43°C Ambient

Built-In Air Rear Duct For Even Temperature Distribution

R134A/R404A Refrigerant

Zero ODP Injected Polyurethane Insulation - 90mm

-2 / +4°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Hot Gas Defrost

Door Locks Fitted As Standard

Rifle Bore Coated Evaporators

Ergonomic Flush Door Handle

Gastronorm Shelving System - Anti Tilt Slides

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect Compressor From Blocked Condensers

Self Closing Doors

Adjustable Legs

Waste Heat Recovery Condensate Vaporiser System

Precision's durable all stainless steel top mount cabinets have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions. Proudly designed in the UK, these GN2/1 cabinets are capable of meeting the highest demands of commercial kitchens all around the world.



PT601

### Options:

Extra Std Nylon Coated Shelves / Slides - GN2/1

Stainless Steel Shelves / Slides - GN2/1

Extra Shelf / Pan Slides

600 x 400 Bakery Racking - 20 Pairs Of Slides / Door

Fish Shelving - 8 x GN2/1 - 100mm Deep - Stainless Steel Pans & Slides per section with Slime Trays

Stainless Steel Back


Left Hand Hinged Door

Heavy Duty Brake & Swivel Castors

Remote - Excludes Condensing Unit But Includes Expansion and Solenoid Valve (Fitted)

Precision Connect

Half Solid Doors/Half Glass Doors

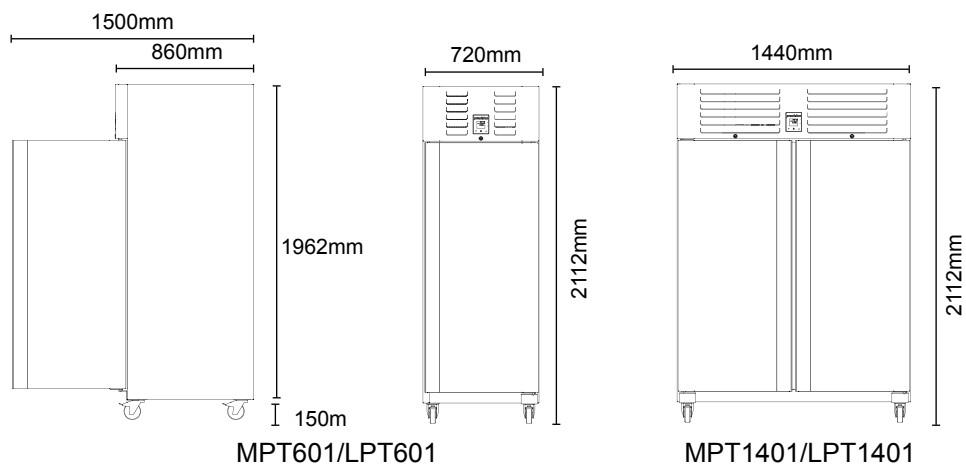

Model	MPT601	LPT601	MPT1401	LPT1401
Type	Refrigerator	Freezer	Refrigerator	Freezer
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN2/1	GN2/1	GN2/1	GN2/1
Number of Shelves	4	4	8	8
Max Number of Shelves (100mm Spacing)	14	14	28	28
Temperature Range	-2 / +4°C	-18 / -22°C	-2 / +4°C	-18 / -22°C
Exterior WxDxH (mm)	720x860x2112	720x860x2112	1440x860x2112	1440x860x2112
Net Usable Volume (litres)	600	600	1400	1400
Weight (KG)	138	146	210	230
Refrigerant	R134a	R404A	R134a	R404A
Refrigeration Watts (+45°C Condensing)	373	503	964	735
Evaporating Temp	-10°C	-30°C	-10°C	-30°C
Heat Rejection Watts*	569	892	1446	1102
Power	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1
Running Amps	1.3	2.7	4	3.1
Total Electrical Load - kW	0.29	0.59	0.88	0.68

\* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet