




HUBC411

4 x GN1/1 Drawers

Precision Under Broiler Counters are designed to provide refrigerated storage, in an easy pull-out drawer format, under the chargrill or griddle within the cooking line. This reduces non productive time and congestion within the kitchen giving staff refrigerated storage exactly where it's needed.

Proudly designed in the UK, these robust counters are capable of meeting the highest demands of commercial kitchens all around the world.

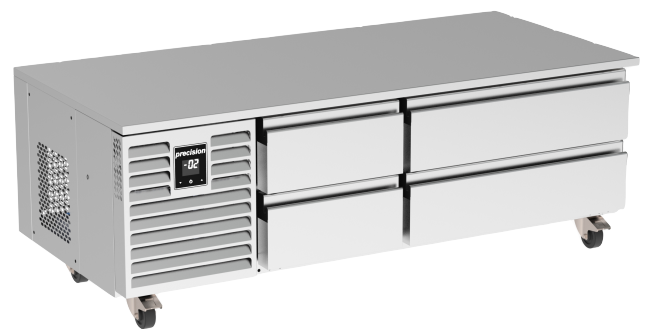

HUBC412

2 x GN1/1 Drawers & 2 x GN2/1 Drawers

Key Features:

Stainless Steel Interior & Exterior

Front Breathing & Rear Venting Refrigeration System
Designed To Operate In 43°C Ambient

GN 1/1 and/or GN 2/1 Drawer System

Left Hand Condensing Unit

R134A Refrigerant

Zero ODP Injected Polyurethane Insulation - 60mm

+1 / 4°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Off Cycle Defrost

Heat Resistant Worktop Designed To Carry Up To
150kg (Evenly Spread)

Rifle Bore Coated Evaporators

Integrated Flush Door Handle

Gastronorm Sized Drawers

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect
Compressor From Blocked Condensers

Adjustable Legs

Waste Heat Recovery Condensate Vaporiser System

Options:

Single Deep Drawer In Place Of Bank Of 2 Drawers


Drawer Locks

ST/ST Back


Precision Connect

Notes:


Ventilation At Rear Required When Plinth Mounted

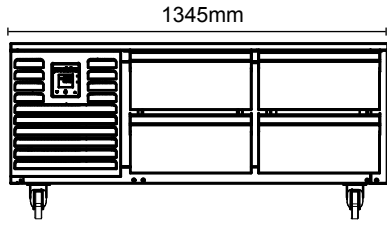


HUBC411

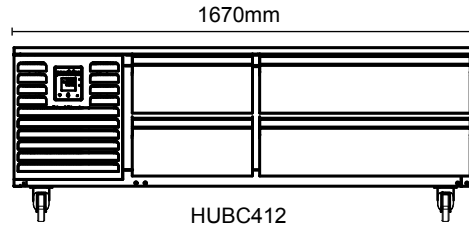

HUBC412

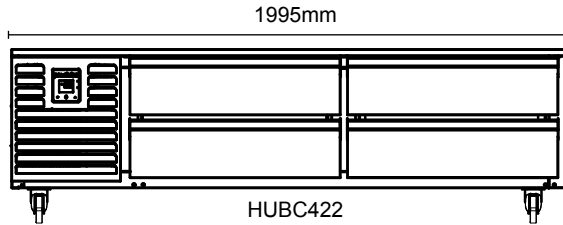

HUBC422

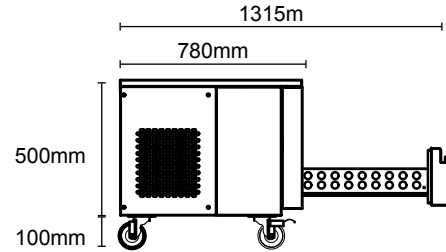

Model	HUBC411	HUBC412	HUBC422
Type	Refrigerator	Refrigerator	Refrigerator
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Drawer Size	4 x GN1/1	2 x GN1/1 + 2 x GN2/1	4 x GN2/1
Maximum Pan Depth	100mm	100mm	100mm
Max Number of Shelves	N/A	N/A	N/A
Temperature Range	+1 / 4°C	+1 / 4°C	+1 / 4°C
Exterior WxDxH (mm)	1345x780x600	1670x780x600	1995x780x600
Net Usable Volume (litres)	69.6	104.3	139
Weight (KG)	110	140	170
Refrigerant	R134a	R134a	R134a
Refrigeration Watts (+45°C Condensing)	373	373	373
Evaporating Temp	-10°C	-10°C	-10°C
Heat Rejection Watts*	560	560	560
Power	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1
Running Amps	1.7	1.7	1.7
Total Electrical Load - kW	0.37	0.37	0.37

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet