



HPU150/LPU150

Proudly designed in the UK, Precision's durable all stainless steel under counters have been designed to provide medium duty under counter storage solutions for commercial kitchens all around the world.

These under counters are available in both refrigerated and deep freeze versions and are perfect for space optimisation, in even the smallest of kitchens.

Key Features:

Stainless Steel Interior & Exterior

Front Venting Refrigeration System

32°C Ambient Rated Product

R134a Refrigerant

Zero ODP Injected Polyurethane Insulation

+1 / 4°C Refrigerator Temperature Range (HPU) -18 /
-22°C Freezer Temperature Range (LPU)

Electronic Controller With Easy Read LCD Screen

Off Cycle Defrost - Refrigerator

Manual Defrost - Freezer

Door / Drawer Locks Fitted As Standard

Integrated Flush Door Handle

Adjustable Pilaster Shelving System - Refrigerator

Fixed Plate Shelves - Freezer

Hi / Lo Audio Visual Temperature Alarms

Adjustable Levelling Feet At Front

Rollers At Rear For Easy Positioning

Waste Heat Recovery Condensate Vaporiser System
(HPU)

Requires Small Ventilation Gap Above Unit



HPU152

HPU153

Options:

Bank of 2 Drawers - (270/270mm) - HPU152


Bank of 3 Drawers - (150/150/150mm) - HPU153

Extra Shelves / Slides

Extra Shelf Clips

Stacking Kit

Left Hand Hinged Door

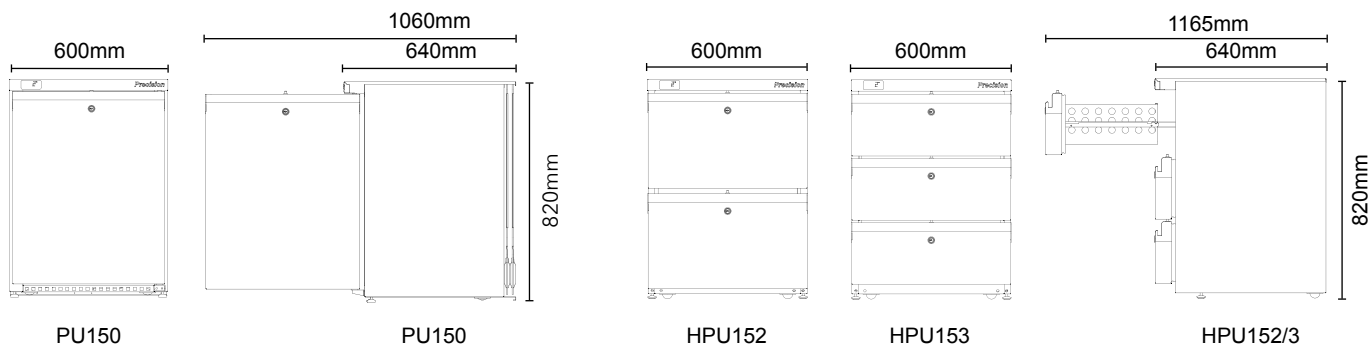

Model	HPU150	HPU152	HPU153	LPU150
Type	Refrigerator	Refrigerator	Refrigerator	Freezer
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf / Drawer Size	480 x 360 480 x 310	N/A	N/A	N/A
Number of Shelves	2	N/A	N/A	N/A
Max Number of Shelves	2	N/A	N/A	N/A
Temperature Range	+1 / 4°C	+1 / 4°C	+1 / 4°C	-18 / -22°C
Exterior WxDxH (mm)	600x640x820	600x640x820	600x640x820	600x640x820
Internal Drawer Dimensions (mm)	N/A	430 x 340 x 270D	430 x 340 x 150D	N/A
Net Usable Volume (litres)	77.5	78.9	65.29	76.7
Weight (KG)	62	70	75	60
Refrigerant	R134a	R134a	R134a	R134a
Refrigeration Watts (+45°C Condensing)	202	202	202	112
Evaporating Temp	-10°C	-10°C	-10°C	-30°C
Heat Rejection Watts*	303	303	303	168
Power	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1
Running Amps	0.55	0.54	0.51	0.51
Total Electrical Load - kW	0.12	0.12	0.11	0.11

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet