



HWU211 (Glass Doors)

Precision's durable all stainless steel GN1/1 wall cabinets have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions when space is at a premium.

Proudly designed in the UK, these wall cabinets provide practical and accessible refrigerated storage right where it's needed.

Heavy duty wall mounting kit is provided, however, the wall and fixings must be capable of carrying the fully loaded cabinet.

Key Features:

Stainless Steel Interior & Exterior

Front Breathing & Venting Refrigeration System

Designed To Operate In 43°C Ambient

Centrally Positioned Evaporator Between Doors

R134A Refrigerant

Zero ODP Injected Polyurethane Insulation - 60mm

+1 / 4°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Automatic Off Cycle Defrost

Rifle Bore Coated Evaporators

Condensing Unit Safety System To Protect Compressor From Blocked Condensers

Integrated Flush Door Handle

Gastronorm GN1/1 Shelving System - Anti Tilt Slides

Hi / Lo Audio Visual Temperature Alarms

Wall Mounting Kit Provided

Self Closing Doors

Waste Heat Recovery Condensate Vaporiser System



HWU211

Options:

Glass Doors & Interior Light


Door Locks

Extra Std Nylon Coated Shelves / Slides - GN1/1

Right Hand Hinged Door (HWU111)

Floor Mount Model - On Levelling Feet +20mm

Precision Connect

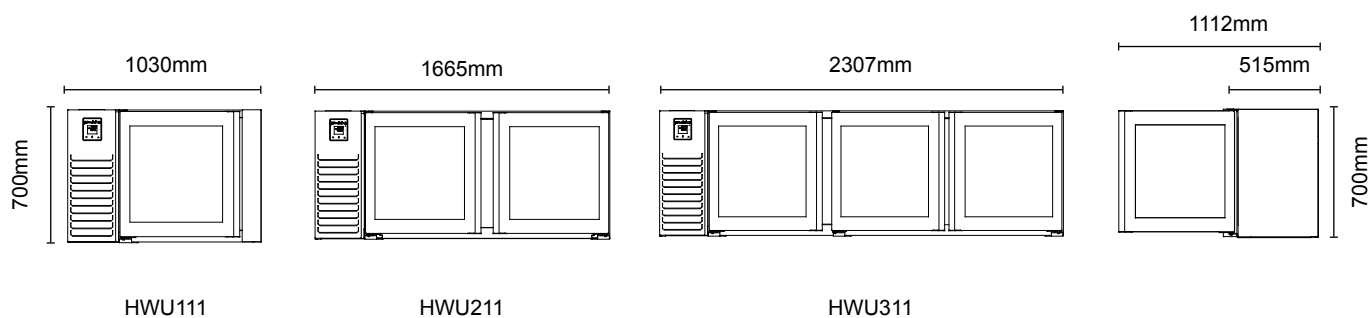

Model	HWU111	HWU211	HWU311
Type	Refrigerator	Refrigerator	Refrigerator
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN1/1	GN1/1	GN1/1
Number of Shelves	2	4	6
Max Number of Shelves (50mm Spacing)	9	18	27
Temperature Range	+1 / 4°C	+1 / 4°C	+1 / 4°C
Exterior WxDxH (mm)	1030x515x700	1665x515x700	2307x515x700
Net Usable Volume (litres)	150	300	450
Weight (KG)	80	110	140
Refrigerant	R134a	R134a	R134a
Refrigeration Watts (+45°C Condensing)	405	405	405
Evaporating Temp	-8°C	-8°C	-8°C
Heat Rejection Watts*	608	608	608
Power	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1
Running Amps	1.3	1.3	1.3
Total Electrical Load - kW	0.29	0.29	0.29

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet